




Important Notes!

Check when you install Dual port QSFP HBA card " Z2D-G3" (PCIe3.0)

v1.5 (Dec. 16th, 2014)


Accusys[®]
The RAID Architects

1. What should be in the box?

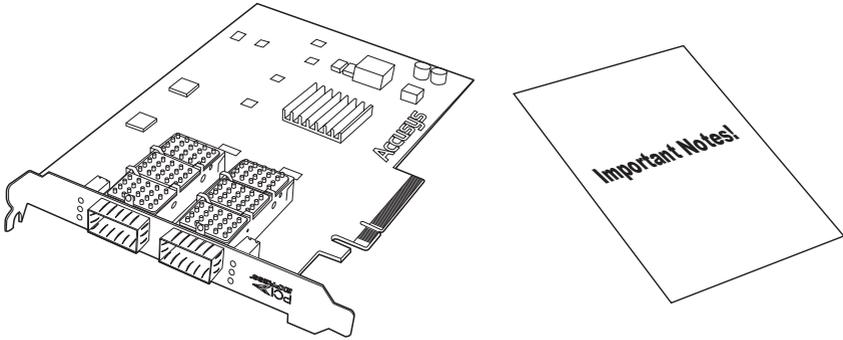


2. What "Z2D-G3" supports?


The Dual Port QSFP HBA card "Z2D-G3" **DOES NOT SUPPORT** ExaSAN Switches.

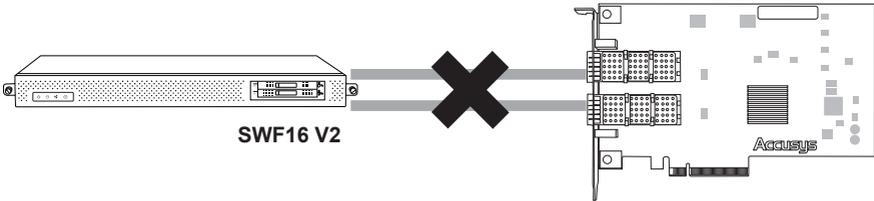

The Dual Port QSFP HBA card "Z2D-G3" **ONLY SUPPORT** Direct attached storage.

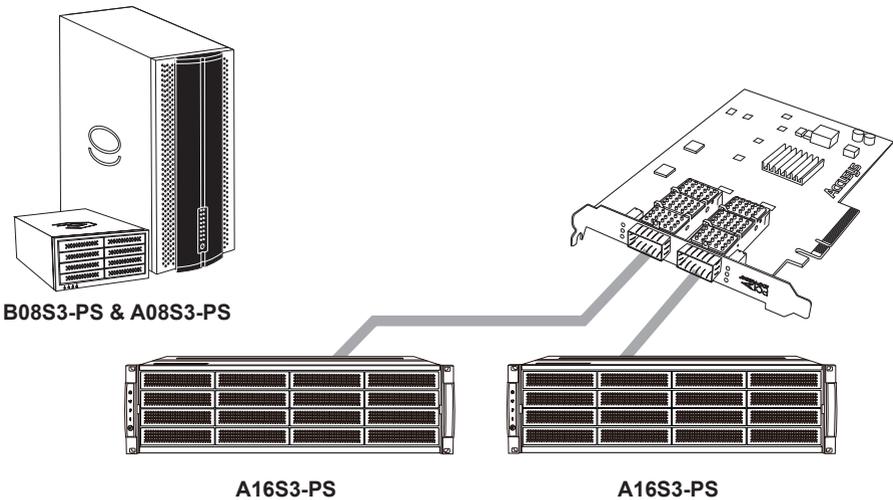


3. Cable connection of "Z2D-G3"

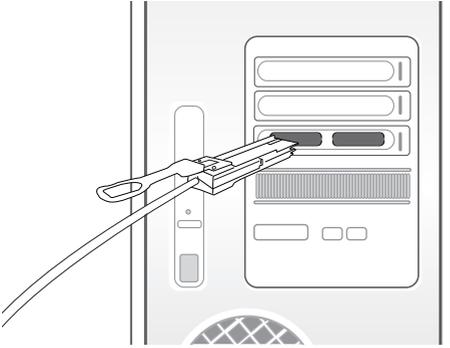

When you insert the cable to one of the QSFPP dual ports correctly, you will feel a click that locks the connector.


Right and Top

The cable, with the ring pull on the top, is inserted correctly when you see the PCIe logo on the bracket on the right side.

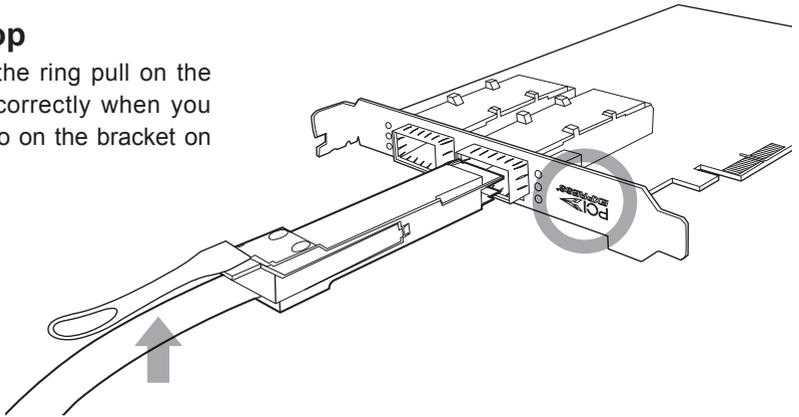


Left and Down

If the PCIe logo on the bracket is on the left side, cable should be inserted with the ring pull on the bottom.

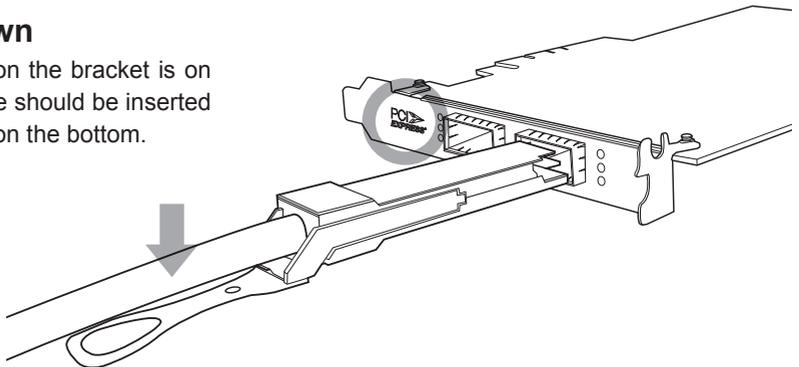

4. Power on storage, once ready, power on workstation

QSFP HBA Status and Indicator LEDs

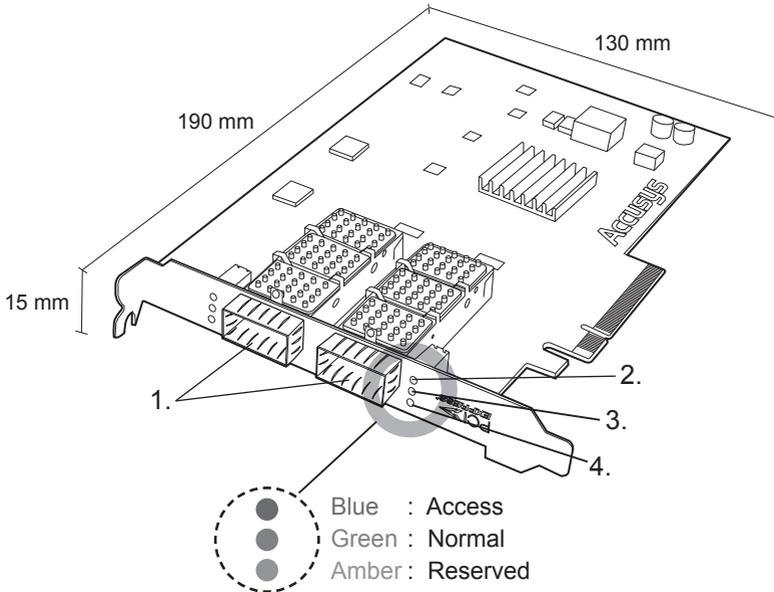

No.	Name	Description
1.	QSFP Connector	For connection with the Host Port on A08S3-PS or A16S3-PS or B08S3-PS.
2.	Access LED Indicator	Flashing blue indicates data transfer is occurring.
3.	Link LED Indicator	Steady green indicates a PCIe 3.0 link. Flashing green indicates a PCIe 2.0 or lower. Off (no light) indicates a link with trouble or no link.
4.	Reserved LED Indicator	Reserved