


SpyderCHECKR™


The replacement cards you have purchased are easy to replace in your SpyderCheckr™. Simply follow these step-by-step instructions:

1

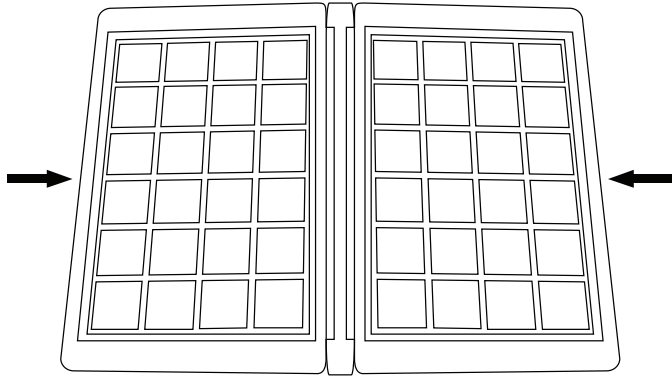


Open your SpyderCheckr™ and locate the recessed areas in the middle of each side of the case.

2

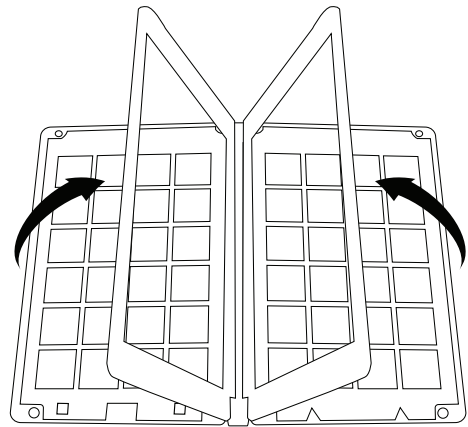


Holding the case with one hand, use your other hand to gently lift the inner frame up to access the color card. The inner frame has magnets in the corners to hold it securely to the outer case.

3

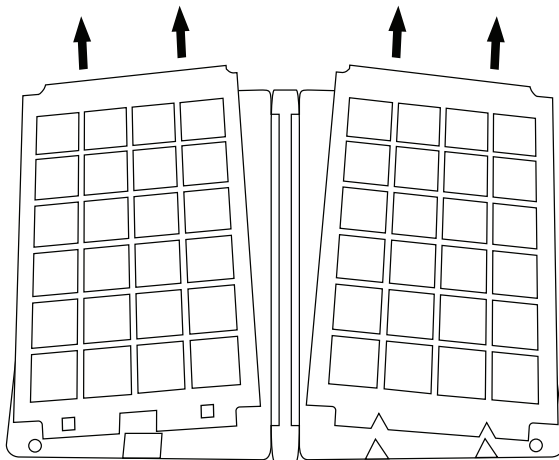


Lift each card out of the frame, taking note of the slots in each card that align with the tabs in the frame. The replacement cards will align with these tabs so you must replace the new cards in the same side as the originals.

4

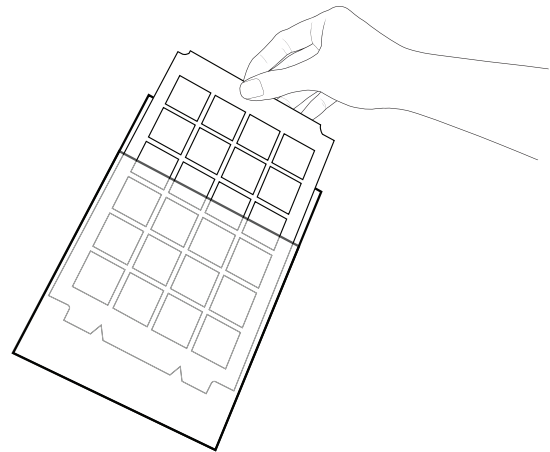


Remove the replacement cards from the protective plastic bag in the packaging, taking care to handle each card by the edges to avoid touching the color patches. Skin oils or debris from your fingers could soil the colors and may leave permanent marks that can not be removed.

5

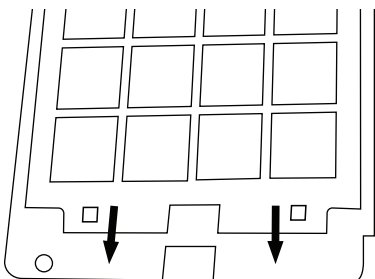

Look at each card to determine the correct placement in the Checkr frame. The color card with the large rectangular slot and the FadeCheckr patch at the bottom is to be placed in the left side of the frame. Holding the card by the edges, gently lay it inside the frame taking note of the rectangular tab at the bottom and align it properly in the slot in the card. The rounded notches in the top edge of the card should fit between the round tabs in the top of the frame. With the card placed in the correct position, gently lower the inner frame to secure the card in the frame (you will hear a click when the magnets on each corner of the frame align as it is closed).

6

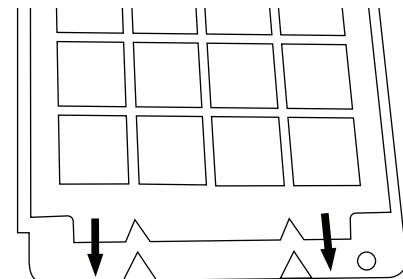

Now perform the same procedure for the other card – note that it has two triangle shaped slots at the bottom. Align these slots with the triangle tabs on the bottom and the rounded notches at the top edge and close the right side frame to secure the card.

The installation is complete!

Use and Care of your SpyderCheckr™

- Always keep the unit closed when not in use. All types of light will fade the colors on the cards over time. This will assure the longest service life for your SpyderCheckr™.
- Always use caution when handling the cards when you change them from the color side to the gray scales on the reverse to avoid contaminating the surface areas.
- Keep the unit away from any heat source and out of direct sunlight when storing it between use. Do not leave it in a parked car exposed to the sun where interior temperatures can exceed 130° F.
- Use the FadeCheckr feature to determine how much the color patches have faded. Compare the square on the left side that is exposed to light to the one that is hidden behind the plastic frame to determine the level of fading. When the color of the FadeCheckr indicator on the left side of the card changes from red to a lighter shade approximately 50% of the unexposed square, it is time to replace the color cards.

Limited Warranty

The SCK100RC Replacement Cards are warranted to be free from defects in material and workmanship during normal usage for one year from date of purchase. This warranty does not cover defects caused by mishandling or misuse of the product. Datacolor will not pay any kind of damages caused by defective product including consequential or incidental damages. Our total liability is limited to the purchase price, not including taxes or shipping. Some states or countries do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary by state or country.

For additional information, please go to our site to access the complete user guide:
<http://www.datacolor.com/goto/Checkrhelp>