



Halogen non-reflector

6958 250W G6.35 24V 1CT

Halogen non-reflector lamps offer high-quality light and are easy to install, replace and operate. All halogen non-reflector lamps incorporate a distortion-free quartz bulb and a precise positioning of the mounted filament. These ensure optimal beam performance and consistent, high light output. A wide range of wattages is available for a broad variety of applications, including projection systems. In addition you get all the proven advantages of halogen technology such as a full spectrum and a color rendering index (CRI) of 100 – the same as natural light and the best that it can be. Halogen lamps also create a comfortable warm white light, and they maintain their lumen output, with almost no reduction, throughout their lifetime.

Product data

• General Characteristics

Philips Code	6958
ANSI Code	EVC/FGX
LIF Code	M33
Cap-Base	G6.35
Bulb Material	Quartz-UV Open
Filament Shape	Flat
Operating Position	s90
Main Application	Projection
Life to 50% failures	300 hr

• Light Technical Characteristics

Color Rendering Index	100 Ra8
Color Temperature	3200 K
Technical	
Luminous Flux Lamp	8400 Lm

• Electrical Characteristics

Lamp Wattage	250 W
Voltage	24 V

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	900 (max) C

• Product Dimensions


Diameter D	13.5 (max) mm
Light Center Length L	32.75 (min), 33 (nom), 33.25 (max) mm
Pin Diameter P	0.95 (min), 1 (nom), 1.05 (max) mm
Filament Dimensions (WxH) [mm]	7.7x3.8

• Product Data

Order code	923882020503
Full product code	923882020503
Full product name	6958 250W G6.35 24V 1CT
Order product name	6958 250W G6.35 24V 1CT/10X10F
Pieces per pack	1
Packing configuration	10X10F
Packs per outerbox	100
Bar code on pack - EAN1	8711500409898
Bar code on intermediate packing - EAN2	8711500420176
Bar code on outerbox - EAN3	8711500423207
Logistic code(s) - 12NC	923882020503
Net weight per piece	4.400 kg



PHILIPS

Dimensional drawing

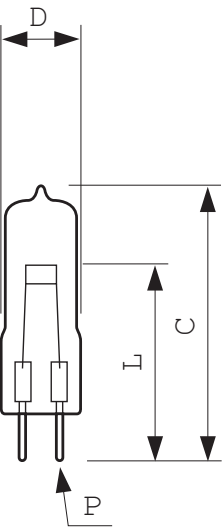

6958 250W G6.35 24V 1CT

Product	C (Norm)	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	P (Min)	P (Norm)	P (Max)
6958 250W G6.35 24V	-	-	13.5	32.75	33	33.25	0.95	1	1.05



G6.35

