



Halogen non-reflector

12345SL 20W G4 12V 1CT

Halogen non-reflector lamps offer high-quality light and are easy to install, replace and operate. All halogen non-reflector lamps incorporate a distortion-free quartz bulb and a precise positioning of the mounted filament. These ensure optimal beam performance and consistent, high light output. A wide range of wattages is available for a broad variety of applications, including projection systems. In addition you get all the proven advantages of halogen technology such as a full spectrum and a color rendering index (CRI) of 100 – the same as natural light and the best that it can be. Halogen lamps also create a comfortable warm white light, and they maintain their lumen output, with almost no reduction, throughout their lifetime.

Product data

• General Characteristics

Philips Code	12345SL
Cap-Base	G4
Bulb Material	Quartz-UV Open
Operating Position	any
Main Application	Projection
Life to 50% failures	100 hr

Diameter D	9 (max) mm
Light Center Length L	19.25 (min), 19.5 (nom), 19.75 (max) mm
Pin Diameter P	0.65 (min), 0.7 (nom), 0.75 (max) mm
Filament Dimensions (WxH) [mm]	-

• Light Technical Characteristics

Color Rendering Index	100 Ra8
-----------------------	---------

• Electrical Characteristics

Lamp Wattage	20 W
Voltage	12 V

• Luminaire Design Requirements

Pinch Temperature	400 (max) C
Bulb Temperature	900 (max) C

• Product Dimensions


Overall Length C	30 mm
------------------	-------

• Product Data

Order code	924068417103
Full product code	924068417103
Full product name	12345SL 20W G4 12V 1CT
Order product name	12345SL 20W G4 12V 1CT
Pieces per pack	1
Packing configuration	10X10F
Packs per outerbox	100
Bar code on pack - EAN1	8711500441812
Bar code on intermediate packing - EAN2	8711500441829
Bar code on outerbox - EAN3	8711500441836
Logistic code(s) - 12NC	924068417103
Net weight per piece	1.300 gr


PHILIPS

Dimensional drawing

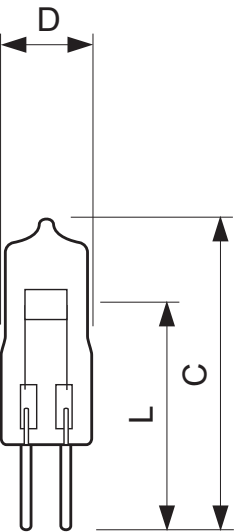

12345SL 20W G4 12V 1CT

Product	C (Norm)	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	P (Min)	P (Norm)	P (Max)
12345SL 20W G4 12V	30	-	9	19.25	19.5	19.75	0.65	0.7	0.75



G4

