

SEE OUR FULL LINE OF PRODUCTS AT: **PELICAN.COM**



PELICAN LIGHTING TOOLS

- Safety Approved lights for hazardous locations
- Specialized lights for fire and rescue operations
- Headlights
- Submersible lights for diving
- Law Enforcement



PELICAN REMOTE AREA LIGHTS

- Solid-state mounted LEDs
- Portable
- Multi-directional lamp heads
- Up to 15 hours of burn time
- Rechargeable



PELICAN PROTECTOR CASES

- Watertight, dustproof, crushproof
- Micro Cases for small electronics
- Specialized laptop and tool organization solutions for off site jobs
- Ruggedized shipping cases for transporting oversized items

PRODUCT WARRANTY

INJECTION MOLDED CASES

Pelican Products, Inc. guarantees its products for a lifetime against breakage or defects in workmanship. Pelican™ injection molded cases are guaranteed to be watertight to a depth of 3.3 feet (1 meter) for 30 minutes (IP 67) if properly closed with undamaged o-ring in place unless otherwise stated. Pelican's liability is limited to the case and not its contents or foam. All warranty claims of any nature are barred if the container has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. Refer to www.pelican.com/warranty for full details.

ROTO MOLDED AND SPECIALTY CASES

Pelican guarantees its Roto Molded cases for 1 year against defects in materials and workmanship and 90 days on hardware from the proof of purchase. All warranty claims of any nature are barred if the container has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. Refer to www.pelican.com/warranty for full details.

FLASHLIGHTS

Pelican Products, Inc. guarantees its products for a lifetime against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries (rechargeable or alkaline). All warranty claims of any nature are barred if the flashlight has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. Refer to www.pelican.com/warranty for full details.

AALG PRODUCTS

Pelican guarantees its AALG products for 1 year against defects in materials and workmanship from the date of purchase. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. Refer to www.pelican.com/warranty for full details.

Refer to www.pelican.com/warranty for full details of Pelican warranties.



23215 Early Avenue, Torrance, CA 90505
 Toll Free 866-583-0426 • Fax: 310.326.3311
www.pelican.com
 Part No. 0030-008-400 OC/13

© 2012 Pelican Products, Inc.
 All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates.

DISTRIBUTED BY:




SAFETY APPROVED LIGHTING SOLUTIONS



FOR ADDITIONAL INFORMATION
 AND A DEMONSTRATION

CALL Toll Free 866-583-0426


HEADLIGHTS

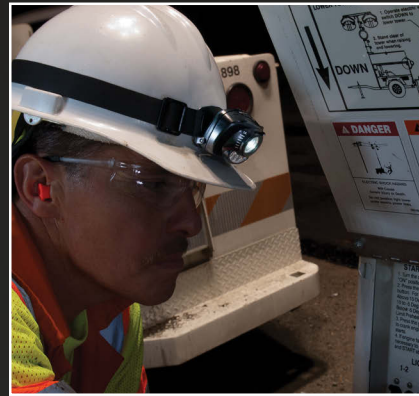

RIGHT ANGLE LIGHTING




LED AREA LIGHTS

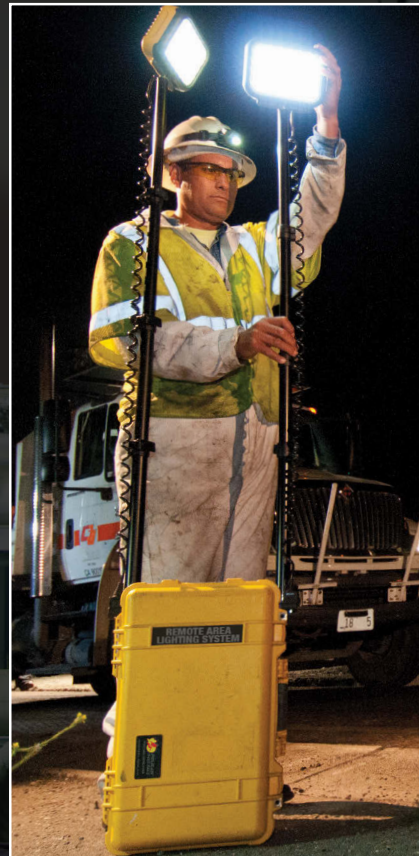

BRIGHTER • SAFER • CLEANER

When planning refinery turnarounds, several factors must be taken into consideration. Lighting, whether fixed or mobile, should be at the top of the list. Pelican offers multiple solutions for all stages of refinery turnarounds, general maintenance, and refractory services. We are the leaders in safety approved portable lighting.

Our vast array of lighting tools range from LED headlights to portable work lights (LED AREA LIGHTING).

SAFETY APPROVED

To find the right light for your job visit us at Pelican.com/safety or call 1-866-583-0426

 Underwriters Laboratory	 Factory Mutual	 Canadian Safety Health Administration	 International Electrotechnical Commission
 Intertek 3091325 Electrical Testing Laboratories	 SGS U.S. Testing Company	 Certified Electrical Safety	 ATEX Europe

LED FLOOD LIGHTING

- Quiet
- No need for Fuel or Diesel
- Eliminates loss of primary containment (LOPC)
- Improves worker efficiency
- Increases worker safety



RALS	BATTERIES Included	WEIGHT with Batteries	LENGTH Extended Height	LUMENS	RUNTIME	BEAM SPREAD	LEDs	HEADS	APPROVALS
9435	Rechargeable NiMH	17.6 lbs. (7.98 kg)	32.28" (82 cm)	1500 (high) 750 (low)	5h (high), 10h (low)	90°	18 per head	1	CI D2
9460	12v Rechargeable, Sealed	50.71 lbs. (23 kg)	70.87" (179.9 cm)	4000 (high) 2000 (low)	7h (high), 14h (low)	90°	24 per head	2	N/A
9470	12v Rechargeable, Sealed	88.18 lbs. (40 kg)	72.85" (185 cm)	8000 (high) 4000 (low)	7h (high), 14h (low)	90°	24 per head	4	N/A

FLASHLIGHTS AND HEADLIGHTS



FLASHLIGHTS	BATTERIES * Batteries Included	WEIGHT with Batteries	LENGTH	ANSI LIGHT OUTPUT (Lumens)	ANSI RUNTIME	APPROVALS
2690	3 AAA Alkaline*	2.8 oz. (0.08 kg)	2.81" (7.1 cm)	60	10h 30m	CI D1
2010	3 C Alkaline	3.4 oz. (0.38 kg)	8.11" (20.6 cm)	109	32h	CI D1
2410	4 AA Alkaline*	7.3 oz. (0.21 kg)	7" (17.8 cm)	126	7h 30m	CI D1
3715	4 AA Alkaline	14.4 oz. (0.41 kg)	5.36" (13.6 cm)	175 (H) 95 (L)	4h 45m (H), 8h 30m (L)	CI D1