

SEE OUR FULL LINE OF PRODUCTS AT: **PELICAN.COM**




PELICAN LIGHTING TOOLS

- Safety Approved lights for hazardous locations
- Specialized lights for fire and rescue operations
- Headlights
- Submersible lights for diving



PELICAN REMOTE AREA LIGHTS

- Solid-state mounted LEDs
- Portable
- Multi-directional lamp heads
- Up to 40 hours of burn time
- Rechargeable

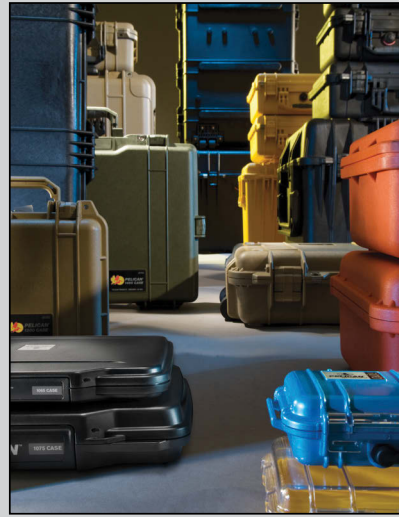

PELICAN PROTECTOR CASES

- Watertight, dustproof, crushproof
- Micro Cases for small electronics
- Specialized laptop and tool organization solutions for off site jobs
- Ruggedized shipping cases for transporting oversized items

PRODUCT WARRANTY

INJECTION MOLDED CASES

Pelican Products, Inc. guarantees its products for a lifetime against breakage or defects in workmanship. Pelican™ injection molded cases are guaranteed to be watertight to a depth of 3.3 feet (1 meter) for 30 minutes (IP 67) if properly closed with undamaged o-ring in place unless otherwise stated. Pelican's liability is limited to the case and not its contents or foam. All warranty claims of any nature are barred if the container has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. Refer to www.pelican.com/warranty for full details.

ROTO MOLDED AND SPECIALTY CASES

Pelican guarantees its Roto Molded cases for 1 year against defects in materials and workmanship and 90 days on hardware from the proof of purchase date. All warranty claims of any nature are barred if the container has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. Refer to www.pelican.com/warranty for full details.

FLASHLIGHTS

Pelican Products, Inc. guarantees its products for a lifetime against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries (rechargeable or alkaline). All warranty claims of any nature are barred if the flashlight has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. Refer to www.pelican.com/warranty for full details.

AALG PRODUCTS

Pelican guarantees its AALG products for 1 year against defects in materials and workmanship from the date of purchase. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. Refer to www.pelican.com/warranty for full details.

Refer to www.pelican.com/warranty for full details of Pelican warranties.



23215 Early Avenue, Torrance, CA 90505
Toll Free 866-583-0426 • Fax 310.326.3311
www.pelican.com

© 2012 Pelican Products, Inc.
All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates.

DISTRIBUTED BY:

AVIATION

LIGHTING AND PROTECTOR CASES



WATERTIGHT CRUSHPROOF DUSTPROOF

Known worldwide as the leader in asset protection, Pelican™ cases keep million dollar unmanned aerial vehicles operational and custom 3D camera lenses dry. Our wide range of injection molded and roto molded cases keep you organized, whether you're a mechanic that needs tool control solutions, a parts developer with FOD concerns or an inventory manager tracking rotatable spares.

CASES



AL2013-0903 **AL3418-1005** **AL4024-1305**

CASES	INTERIOR DIMENSIONS	EXTERIOR DIMENSIONS	WEIGHT
AL2013-0903	19.87" x 13.00" x 12.25" (50.4 x 33 x 31.1 cm)	22.87" x 16.00" x 13.94" (58.1 x 40.6 x 35.4 cm)	16.8 lbs. (7.62 kg)
AL3418-1005	34.18" x 17.87" x 15.37" (86.8 x 45.4 x 39 cm)	37.18" x 20.87" x 17.31" (94.4 x 53 x 44 cm)	30.6 lbs. (13.88 kg)
AL4024-1305	39.87" x 24.31" x 18.00" (101.2 x 61.7 x 45.7 cm)	42.87" x 27.31" x 20.19" (108.8 x 69.3 x 51.3 cm)	50.2 lbs. (22.77 kg)



2075 **0450** **1460 TOOL** **1440** **1630** **2750**

CASES	INTERIOR DIMENSIONS	EXTERIOR DIMENSIONS	WEIGHT
2075	9.50" x 7.50" x 7.25" (24.1 x 19 x 18.4 cm)	11.80" x 9.80" x 7.70" (30 x 24.9 x 19.6 cm)	3.7 lbs. (1.68 kg)
0450	20.56" x 10.97" x 12.65" (52.2 x 27.9 x 32.1 cm)	23.95" x 14.75" x 17.95" (60.8 x 37.5 x 45.6 cm)	41.5 lbs. (18.82 kg)
1460 TOOL	18.54" x 9.92" x 10.92" (47.1 x 25.2 x 27.7 cm)	20.85" x 12.73" x 12.75" (52.9 x 32.3 x 32.4 cm)	13 lbs. (5.9 kg)
1440	17.10" x 7.50" x 16.00" (43.4 x 19 x 40.6 cm)	19.70" x 12.00" x 18.00" (50 x 30.5 x 45.7 cm)	16.5 lbs. (7.48 kg)
1630	27.70" x 20.98" x 15.50" (70.3 x 53.3 x 39.4 cm)	31.28" x 24.21" x 17.48" (79.4 x 61.5 x 44.4 cm)	36 lbs. (16.33 kg)
2750	22.00" x 17.00" x 12.70" (55.9 x 43.2 x 32.2 cm)	24.60" x 19.70" x 14.40" (62.5 x 50 x 36.6 cm)	23.4 lbs. (10.61 kg)

REMOTE AREA LIGHTING SYSTEMS (RALS)



9435 **9420** **9440** **9460**

RALS	BATTERIES Included	WEIGHT with Batteries	LENGTH Extended Height	LUMENS	RUNTIME	BEAM SPREAD	LEDs	HEADS	APPROVALS
9435	Rechargeable NiMH	17.6 lbs. (7.98 kg)	32.28" (82 cm)	1500 (high) 750 (low)	5h (high), 10h (low)	90°	18 per head	1	CI D2
9420	Rechargeable Lithium ion	8.4 lbs. (3.81 kg)	62" (157.4 cm)	1000 (high) 500 (low)	2h (high), 5h (low)	58°	2 per head	1	CI D2
9440	Rechargeable NiMH	16.09 lbs. (7.3 kg)	86.25" (219 cm)	2400 (high) 1200 (low)	3h (high), 6h (low)	120°	10 per head	1	N/A
9460	12v Rechargeable, Sealed	50.71 lbs. (23 kg)	70.87" (179.9 cm)	6000 (high) 500 (low)	7h (high), 40h (low)	90°	6 per head	2	N/A

BRIGHTER • SAFER • CLEANER

Pelican builds lighting tools for the most extreme environments. Using the latest in LED lighting technology, Pelican builds lighting solutions for all your aviation needs. Safety approved lighting for hazardous environments, rechargeable LED flood lighting when working in hard to reach areas and, in case it is raining on the tarmac, waterproof flashlights. You can rely on our lighting tools to be durable and easy to use.



FLASHLIGHTS AND HEADLIGHTS



FLASHLIGHTS	BATTERIES * Batteries Included	WEIGHT with Batteries	LENGTH	ANSI LIGHT OUTPUT (Lumens)	ANSI RUNTIME	APPROVALS
1910	1 AAA Alkaline	1.4 oz. (0.04 kg)	3.6" (9.1 cm)	39	1h	N/A
1920	2 AAA Alkaline	2.2 oz. (0.06 kg)	5.3" (13.5 cm)	67	2h 45m	N/A
1965	2 AAA Alkaline	1.9 oz. (0.05 kg)	5.48" (13.9 cm)	21	4h	CI D1
2340	2 AA Alkaline	3.5 oz. (0.1 kg)	6.25" (15.9 cm)	10	4h 30m	CI D1
2370	2 AA Alkaline	6.5 oz. (0.18 kg)	6.43" (16.3 cm)	106 (H) 13 (L)	3h 45m (H), 41h 15m (L)	N/A
2690	3 AAA Alkaline	4.1 oz. (0.12 kg)	2.81" (7.1 cm)	60	10h 30m	CI D1
2710	2 AAA Alkaline	2.8 oz. (0.08 kg)	2.58" (6.6 cm)	24 (H) 7 (L)	2h (H), 5h (L)	N/A
2720	3 AAA Alkaline	3.8 oz. (0.11 kg)	2.48" (6.3 cm)	80 (H) 5 (L)	8h (H), 175h (L)	N/A



2010PL **2410PL** **2460** **2365** **9410**

FLASHLIGHTS	BATTERIES * Batteries Included	WEIGHT with Batteries	LENGTH	ANSI LIGHT OUTPUT (Lumens)	ANSI RUNTIME	APPROVALS
2010PL	3 C Alkaline	13.4 oz. (0.38 kg)	8.11" (20.6 cm)	109	32h	CI D1
2410PL	4 AA Alkaline	7.3 oz. (0.21 kg)	7" (17.8 cm)	126	7h 30m	CI D1
2460	4 AA NiMH	7.8 oz. (0.22 kg)	7" (17.8 cm)	112	4h 30m	CI D2
2365	2 AA Alkaline	9.3 oz. (0.26 kg)	21.92" (55.7 cm)	49	7h	N/A
9410	4 D Ni-MH	49.28 oz. (1.4 kg)	8.75" (22.2 cm)	741 (H) 300 (L)	1h 45m (H), 4h 45m (L)	N/A